

Our Dutch doors combine traditional charm with unmatched durability, creating a long-lasting solution for your barn. Each door is handmade using premium materials that outperform standard options in both strength and appearance. Designed to allow airflow and visibility while maintaining security, these doors are a smart and stylish upgrade for any horse barn.

# Standard Features

- Heavy-duty tubular aluminum construction
- 1.5" x 3.5" tube frame for easy exterior finishing
- Welded-on greasable hinges
- Typically less than 1 hour for installation
- Stainless steel slide latch
- Multi-step primer & powder coat; 35 colors available

# Our In-Stock Sizes

- 47.5" x 83.5" with Window Top
- 47.5" x 83.5" with Double-X Panel
- 47.5" x 94.5" with Window Top
- 47.5" x 94.5" with Double-X Panel
- Custom sizes and options by special order

## **Custom** Options



Arch-tops

Elegant arch-topped doors make an elegant design statement.

Premium Finishes Powder coat with a realistic wood finish. 12 wood color options, available for beadboard panels only.



Insulation Foam-filled tubing provides extra thermal protection.



Protective Screen

Hinged stainless steel screen door adds ventilation, flexibility, safety, and security.


horsebarnsupplies.com

| 127 Meadow Creek Rd, New Holland, PA | 717.354.7862



# Dutch Door with Double-X Details



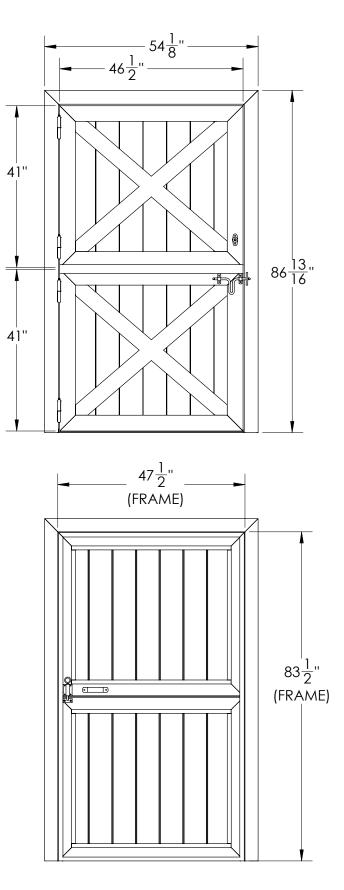

\*DIMENSIONS ARE IN INCHES PROPRIETARY AND CONFIDENTIAL 4' X 7' R.O. DUTCH J&E GRILL MANUFACTURING DRAWN THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF J&E GRILL MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF J&E GRILL MANUFACTURING IS PROHIBITED. MPB MATERIAL ALUMINUM DOOR WITH DOUBLE X 127 MEADOW CREEK ROAD POWDER COATED FINISH NEW HOLLAND, PA 17557 MFG WEIGHT 165.68 lbs

### Framing / Opening Preparation


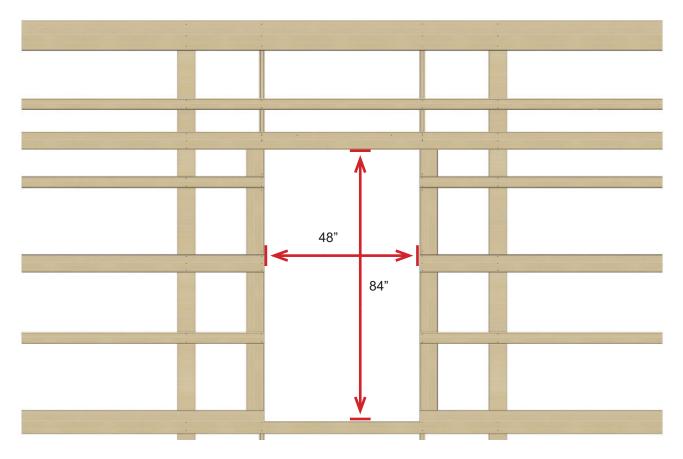


Image shows suggested framing for pole barn installation. Recommended rough opening size is 48" x 84".

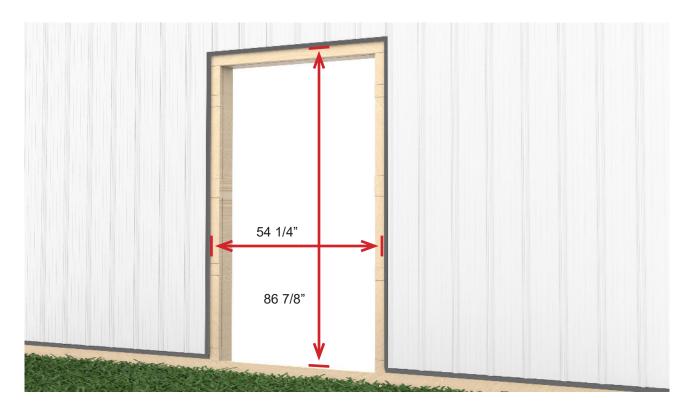

Although not recommended by J&E, siding can be installed before the door. Allow 1/16" gap on sides and top. Refer to print for outer door dimensions.